

Accessories

GONSIN[®]
Delivering Trust & Value



◆ Charging Case

GX-60/60B/60C

◆ Features

- ◆ Intelligent charging management
- ◆ Independent LED indicators for charging status
- ◆ Portable aluminum storage case
- ◆ Anti-misplug design for charging port




◆ Functions

- ◆ Aluminum storage flight case for charging & storage
- ◆ Accommodates up to 60 units
- ◆ Independent management for each charging port, it will automatically charge the unit with low battery, it will stop charging if the unit is fully charged to ensure the security
- ◆ Independent LED indicators for charging status
- ◆ Charging time: 2.5 hours
- ◆ Anti-misplug design for charging port
- ◆ GX-60 is suitable for charging IR simultaneous interpretation system receivers
- ◆ GX-60B is suitable for charging TC-FSJ04/08/12/16 wireless simultaneous interpretation receivers, BJ-W5 voting units and BJ-W5I voting and interpretation units
- ◆ GX-60C is suitable for charging TC-FSJ04B/08B/12B/16B wireless simultaneous interpretation receivers.

◆ Technical Specifications

Power input	AC100V~240V, 50/60Hz
Capacity	60 units
Charging time	2.5 hours
Charging indicator	LED indicator
Dimension (L*W*H)	680mm×430mm×245mm
Weight	11 Kg
Operating temperature	0~45°C
Storage temperature	-20~50°C



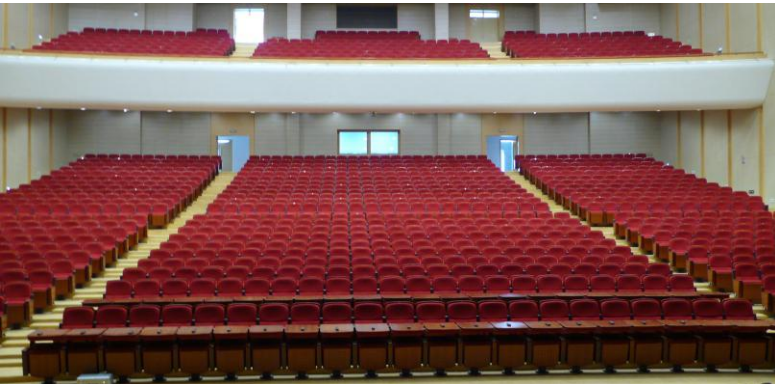

◆ Charging Case

GX-20S

◆ Features

- ◆ Intelligent charging management
- ◆ Independent LED indicators for charging status
- ◆ Portable aluminum storage case
- ◆ Anti-misplug design for charging port

◆ Functions

- ◆ Aluminum storage flight case for charging & storage
- ◆ Accommodates up to 20 simultaneous interpretation receivers
- ◆ Independent management for each charging port, it will automatically charge the unit with low battery, it will stop charging if the unit is fully charged to ensure the security
- ◆ Independent LED indicators for charging status
- ◆ Charging time: 4 hours
- ◆ GX-20S is suitable for FS-FHSS wireless simultaneous interpretation receivers TC-RFJ04S/08S/12S/16S

◆ Technical Specifications

Power input	100-240V, 50-60Hz
Capacity	20
Charging Indicator	LED
Dimensions	590x300x200 mm (W x D x H)
Net Weight	6.65 Kg
Operating temperature	0~45°C
Storage temperature	-20~50°C

◆ Charging Case

CHG-28

◆ Features

- ◆ Real-time management for battery and charging current
- ◆ LED indicator for charging status
- ◆ Anti-misplug design for battery
- ◆ Short circuit protection for charging



◆ Functions

- ◆ Smart management ensures safe and reliable charging; The real-time management for battery capacity and charging current prolongs battery life;
- ◆ Independent modularized charging circuit enables battery detection; this circuit does not work if no battery is detected;
- ◆ Accommodates up to 28 batteries;
- ◆ Red/green charging LED indicator;
- ◆ CHG-28 is suitable for Gonsin BJ-04-W.

◆ Technical Specifications

Power supply	AC100~240V, 50~60Hz
Max. charging voltage	4.2 V
Power	106 W
Charging time	3 hours
Weight	6.3 kg (net weight), 6.9 kg (full load)
Dimensions	490mm×320mm×67.5mm
Working temperatur	0~45°C
Storage temperature	-20~50°C

◆ Charging Case

CHG-16

◆ Features

- ◆ Real-time management for battery and charging current
- ◆ LED indicator for charging status
- ◆ Anti-misplug design for battery
- ◆ Short circuit protection for charging



◆ Functions

- ◆ Smart management ensures safe and reliable charging; The real-time management for battery capacity and charging current prolongs battery life;
- ◆ Independent modularized charging circuit enables battery detection; this circuit does not work if no battery is detected;
- ◆ Accommodate up to 16 batteries;
- ◆ Red/green charging LED indicator;
- ◆ CHG-16 is suitable for DCS-3021 conference terminal.

◆ Technical Specifications

Power supply	AC100~240V, 50~60Hz
Max voltage	4.2 V
Power	106 W
Charging time	3.5 hours
Weight	6.7Kg(net)/ 7.4 Kg (full load)
Dimensions	490mm×320mm×67.5mm
Operating temperature	0~45°C
Storage temperature	-20~50°C

◆ Universal Cables and Accessories

◆ Connection Cable 8P-T3

Color	Black
Type	8PS
Connectors	Two male, one female
Length	1.5+1.2m
Note: one piece for one discussion unit	



◆ Extension Cable 8PS-03/05/10/15/20/40

Color	Black
Type	8PS
Connectors	One male, one female
Length	3/5/10/15/20/40m
Note: Select in according to the conference demand	



◆ **Extension cable 8P2-01**

Color	Black
Type	8PS
Connectors	Two male
Length	1m

Note: FS-FHSS discussion server and repeater with one



◆ **Serial Cable RS-232-5**

Color	Black
Type	Db9
Connectors	Two male
Length	5m

Note: Used for server of conference discussion system and voting system



◆ **Connection Cable 13P-T3**

Color	Black
Type	13PS
Connectors	Two male, one female
Length	1.5+1.2m

Note: For each discussion unit



◆ **Extension Cable 13PS-03/05/10/15/20**

Color	Black
Type	13PS
Connectors	One male, one female
Length	3/5/10/15/20m

Note: Choose in according to the conference demand



◆ **Basic Discussion Terminal Connection Cable 6P2-1.5**

Color	Black
Type	2
Connectors	Two male, one female
Length	1.5m

Note: Each DSC discussion terminal with one



Wireless Simultaneous Interpretation Access Point Connection Cable

6P2-01 W

Color	Black
Type	6P2
Connectors	Two male
Length	1.5m

Note: FS-FHSS simultaneous interpretation system with one



Extension Cable 6PS-03\05\10\15\20\40

Color	Black
Type	6PS
Connectors	One male, one female
Length	3/5/10/15/20/40m


Note: Each server has two 12m extension cable



Repeater

Color	Black
Type	RS-485 repeater
Interface	2*8-pin female socket; 2*13-pin female socket
Dimension	110×64×38mm
Shell material	Aluminum

Note: If main cable is longer than 50m, it needs to add repeater (normally, it will added to the middle place of main cable)



IC Card BL7442

Each card has a unique 32-bit serial number and independent password and access control. Users can set different password with software, one card for appointed conference. Data can be preserved up to 10 years and a card can be rewritten up to 100 thousand times with unlimited reading times.

Dimensions	85.6x53.98x0.8 (LxWxD)
Operating temperature	-20°C to 85°C



◆ **Floor Socket GX-8&13S**

Color	Gold
Type	Floor socket
Interface	One 8-pin female socket One 13-pine female socket
Panel Dimension	120×120mm
Installation pitch holes	83.5mm
Panel material	Copper
Material	100×100×55mm
Box material	Full metal



◆ **IC Card Encoder SRD-U100**

Support read out and write down information, reset password

Speed	<0.2s
Interface	USB
Installation	Flush-mounting



◆ **Accessories and Cables of Simultaneous Interpretation System**

◆ **Storage Case**

GX-48

Type	Aluminum carrycase
Capacity	48 receivers
Dimensions	500×330×200 mm(W×D×H)

Note: Also suit for wireless voting units



◆ **IR radiator mounting Bracket**

UA-203

Specification	Hoisting or Wall-hanging
Angle	adjustable

Note: one piece for one radiator



◆ Lanyard RY-123

Color	Grey
Length	40cm
Note: One piece for one receiver	



◆ Hanger N3N1-S-21

Mounting Type	Wall mounting
Angle	Horizontal 15°, Vertical 15°
Bearing	<13.6Kg
Note: Suit for WAP-30/WAP-30I wall mounting	



◆ Tripod stand GX-315

Type	Floor standing
Height	60-150cm
Angle	horizontal
Note: Optional accessory	



◆ Interpreter Cable 25P 3m/5m/10m

Type	25P one male, one female
Length	3m/5m/10m
Interface	25-pin parallel interface
Note: One 3m and one 10m for one interpreter console	



◆ Data HUB HUB-D045

Interface	One male, two female
Function	Amplify 485 signal
Cable	1.5m
Note: Optional accessory	



◆ **Radiator Connection Cable**
75Ω-4-128

Type	75Ω-4-128
Length	10m
Interface	BNC connector
Note: One 10m cable for one radiator	



◆ **Accessories and Cables of Wireless Voting System**

◆ **Power Adapter**

Color	Black
Voltage Input	AC100V~240V, 50/60Hz
Voltage Output	DC12V, 3A
Note: One piece for one base station unit	



◆ **Wireless Voting Base Station Unit Antenna GX-88**

Color	Black
Height	880mm
Connection Cable Length	4m
Note: One piece for each wireless base station unit	



◆ **Plate Directional Aerial HTDF433BKC-Y**

Connector type	N female, at the bottom
Cable length	2 meters (standard configuration)
Installation method	Pole, wall-mounted, ceiling
Gain	6dBi
Half-power beamwidth	Horizontal: 85° Vertical: 120°
Input impedance	50Ω
Dimensions (L×W×H)	223×194×46 mm
Weight	1.1 kg



◆ Signal Detection Antenna HAC-LX

Color	Black
Height	120mm

Note: One piece for each central controller
of wireless voting system



◆ Headphone&Headset

◆ Monaural Headphone TC-D1

Color	Black ring with embedding metal
Type	Monaural mono headphone
Interface	3.5mm
Impedance	40Ω±10%
Frequency reponse range	7 Hz - 24KHz
Voltage	0.4V
Input power	8-50mW
Distortion rate	<5%
Sensitivity	L102dB±3dB



◆ Stereo Headphone TC-D3


Color	Black
Type	Stereo headphone
Interface	3.5mm
Impedance	32Ω±15%
Frequency reponse range	20-20KHz
Voltage	0.8V
Input power	30-50mW
Distortion rate	<5%



◆ Interpreter Headset TC-D4

Color	Black
Type	Stereo headset
Interface	3.5mm
Impedance	32Ω±15%
Frequency reponse range	20 - 20000Hz
Voltage	0.8V
Input power	30-50mW
Distortion rate	<1%



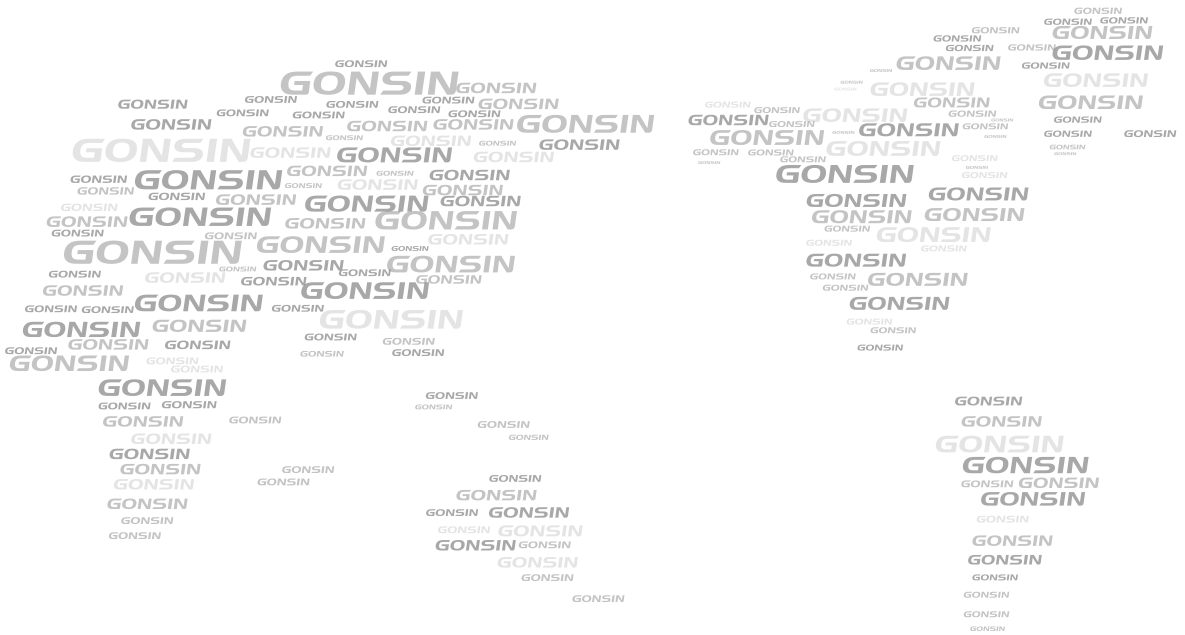

GONSIN CONFERENCE EQUIPMENT CO.,LTD.
www.gonsin.com



English WeChat



All rights reserved. The information and specifications included are subject to change without prior notice.